

## Electronic Shelf Labels(2.4 G)

ESL tags from 1.54 inch to 13.3 inch, 4 series: normal temperature series, low temperature series, waterproof series, large size series.



### Specifications

<b>Product Dimensions (mm*mm*mm)</b>	49*37.6*13.3
<b>Case Color</b>	white
<b>Weight (g)</b>	20
<b>Display Technology</b>	Full graphic E-ink display
<b>Display color</b>	BWRY
<b>Active Display Area (mm*mm)</b>	27.51x27.51
<b>Display Size (inch)</b>	1.54
<b>Resolution (pixel)</b>	200*200
<b>DPI</b>	188
<b>Working life</b>	5 years (4 updates per day)
<b>Battery Spec</b>	1* CR2450, replaceable battery pack
<b>Working Temperature (°C)</b>	0~40
<b>Storage temperature (°C)</b>	0~40
<b>Working Humidity (%RH)</b>	45~70
<b>Protection Level</b>	IP65
<b>Wireless firmware update</b>	Yes
<b>Usable pages</b>	8
<b>LED color</b>	Red,Green and Blue,7 colors can be displayed
<b>Wireless connectivity</b>	Private Protocol
<b>RF Wireless Communication Parameters</b>	Working Frequency: 2400MHz ~ 2480MHz
<b>Communication mode</b>	AP
<b>Communication Distance</b>	Within 20m (Open distance: 50m)
<b>Packing quantity</b>	480/Box(full), 11.6kg



Normal Temperature Series

**2.13"**

Model: DL0213

### Specifications

<b>Product Dimensions (mm*mm*mm)</b>	71*34*12
<b>Case Color</b>	white
<b>Weight (g)</b>	32
<b>Display Technology</b>	Full graphic E-ink display
<b>Display color</b>	BWRY
<b>Active Display Area (mm*mm)</b>	48.55*23.71
<b>Display Size (inch)</b>	2.13
<b>Resolution (pixel)</b>	250*122
<b>DPI</b>	130
<b>Working life</b>	5 years (4 updates per day)
<b>Battery Spec</b>	2 * CR2450, replaceable battery pack
<b>Working Temperature (°C)</b>	0~40
<b>Storage temperature (°C)</b>	0~40
<b>Working Humidity (%RH)</b>	45~70
<b>Protection Level</b>	IP65
<b>Wireless firmware update</b>	Yes
<b>Usable pages</b>	8
<b>LED color</b>	Red,Green and Blue,7 colors can be displayed
<b>Wireless connectivity</b>	Private Protocol
<b>RF Wireless Communication Parameters</b>	Working Frequency: 2400MHz ~ 2480MHz
<b>Communication mode</b>	AP
<b>Communication Distance</b>	Within 20m (Open distance: 50m)
<b>Packing quantity</b>	480/Box(full), 16.6kg



Normal Temperature Series

**2.66"**

Model: DL0266

## Specifications

<b>Product Dimensions (mm*mm*mm)</b>	85.7*41.8*12.3
<b>Case Color</b>	white
<b>Weight (g)</b>	38
<b>Display Technology</b>	Full graphic E-ink display
<b>Display color</b>	BWRY
<b>Active Display Area (mm*mm)</b>	60.09*30.7
<b>Display Size (inch)</b>	2.66
<b>Resolution (pixel)</b>	296*152
<b>DPI</b>	125
<b>Working life</b>	5 years (4 updates per day)
<b>Battery Spec</b>	2 * CR2450, replaceable battery pack
<b>Working Temperature (°C)</b>	0~40
<b>Storage temperature (°C)</b>	0~40
<b>Working Humidity (%RH)</b>	45~70
<b>Protection Level</b>	IP65
<b>Wireless firmware update</b>	Yes
<b>Usable pages</b>	8
<b>LED color</b>	Red,Green and Blue,7 colors can be displayed
<b>Wireless connectivity</b>	Private Protocol
<b>RF Wireless Communication Parameters</b>	Working Frequency: 2400MHz ~ 2480MHz
<b>Communication mode</b>	AP
<b>Communication Distance</b>	Within 20m (Open distance: 50m)
<b>Packing quantity</b>	270/Box(full), 11.7kg



Normal Temperature Series

**2.9"**

Model: DL0290

### Specifications

<b>Product Dimensions (mm*mm*mm)</b>	91*42*12.3
<b>Case Color</b>	white
<b>Weight (g)</b>	40
<b>Display Technology</b>	Full graphic E-ink display
<b>Display color</b>	BWRY
<b>Active Display Area (mm*mm)</b>	66.9*29
<b>Display Size (inch)</b>	2.9
<b>Resolution (pixel)</b>	296*128
<b>DPI</b>	112
<b>Working life</b>	5 years (4 updates per day)
<b>Battery Spec</b>	2 * CR2450, replaceable battery pack
<b>Working Temperature (°C)</b>	0~40
<b>Storage temperature (°C)</b>	0~40
<b>Working Humidity (%RH)</b>	45~70
<b>Protection Level</b>	IP65
<b>Wireless firmware update</b>	Yes
<b>Usable pages</b>	8
<b>LED color</b>	Red,Green and Blue,7 colors can be displayed
<b>Wireless connectivity</b>	Private Protocol
<b>RF Wireless Communication Parameters</b>	Working Frequency: 2400MHz ~ 2480MHz
<b>Communication mode</b>	AP
<b>Communication Distance</b>	Within 20m (Open distance: 50m)
<b>Packing quantity</b>	270/Box(full), 12.7kg



## Specifications

<b>Product Dimensions (mm*mm*mm)</b>	101*49.8*12.3
<b>Case Color</b>	white
<b>Weight (g)</b>	47
<b>Display Technology</b>	Full graphic E-ink display
<b>Display color</b>	BWRY
<b>Active Display Area (mm*mm)</b>	79.6*38.2
<b>Display Size (inch)</b>	3.5
<b>Resolution (pixel)</b>	384*184
<b>DPI</b>	122
<b>Working life</b>	5 years (4 updates per day)
<b>Battery Spec</b>	2 * CR2450, replaceable battery pack
<b>Working Temperature (°C)</b>	0~40
<b>Storage temperature (°C)</b>	0~40
<b>Working Humidity (%RH)</b>	45~70
<b>Protection Level</b>	IP65
<b>Wireless firmware update</b>	Yes
<b>Usable pages</b>	8
<b>LED color</b>	Red,Green and Blue,7 colors can be displayed
<b>Wireless connectivity</b>	Private Protocol
<b>RF Wireless Communication Parameters</b>	Working Frequency: 2400MHz ~ 2480MHz
<b>Communication mode</b>	AP
<b>Communication Distance</b>	Within 20m (Open distance: 50m)
<b>Packing quantity</b>	300/Box(full), 15.7kg




Normal Temperature Series

**4.2"**

Model: DL0420

### Specifications

<b>Product Dimensions (mm*mm*mm)</b>	99*89*12.3
<b>Case Color</b>	white
<b>Weight (g)</b>	47
<b>Display Technology</b>	Full graphic E-ink display
<b>Display color</b>	BWRY
<b>Active Display Area (mm*mm)</b>	84.8*63.6
<b>Display Size (inch)</b>	4.2
<b>Resolution (pixel)</b>	400*300
<b>DPI</b>	119
<b>Working life</b>	5 years (4 updates per day)
<b>Battery Spec</b>	3 * CR2450, replaceable battery pack
<b>Working Temperature (°C)</b>	0~40
<b>Storage temperature (°C)</b>	0~40
<b>Working Humidity (%RH)</b>	45~70
<b>Protection Level</b>	IP65
<b>Wireless firmware update</b>	Yes
<b>Usable pages</b>	8
<b>LED color</b>	Red,Green and Blue,7 colors can be displayed
<b>Wireless connectivity</b>	Private Protocol
<b>RF Wireless Communication Parameters</b>	Working Frequency: 2400MHz ~ 2480MHz
<b>Communication mode</b>	AP
<b>Communication Distance</b>	Within 20m (Open distance: 50m)
<b>Packing quantity</b>	180/Box(full), 16.2kg

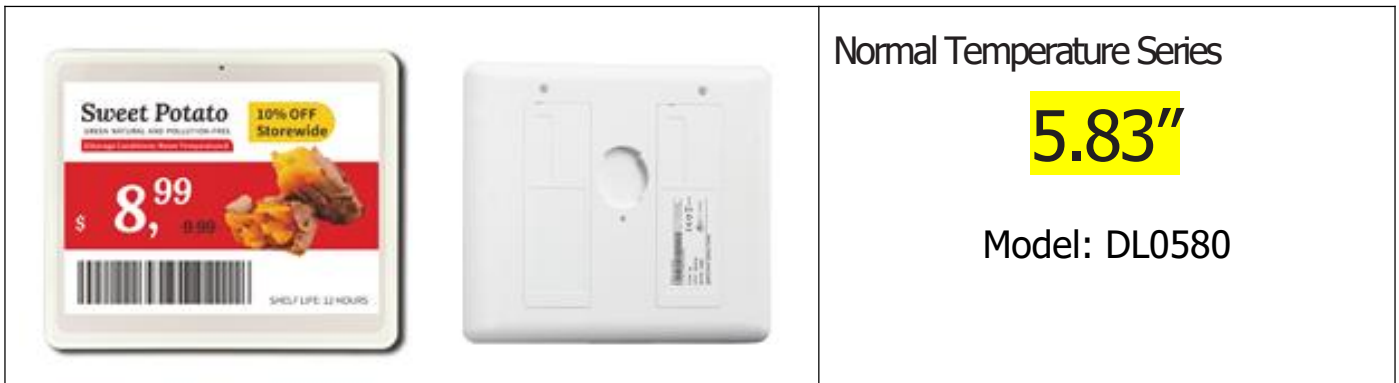

### Specifications

<b>Product Dimensions (mm*mm*mm)</b>	133*113*9
<b>Case Color</b>	White
<b>Weight (g)</b>	135
<b>Display Technology</b>	Full graphic E-ink display
<b>Display color</b>	BWR
<b>Active Display Area (mm*mm)</b>	119*88
<b>Display Size (inch)</b>	5.83
<b>Resolution (pixel)</b>	648*480
<b>DPI</b>	138
<b>Working life</b>	5 years (4 updates per day)
<b>Battery Spec</b>	6 * CR2450, replaceable battery pack
<b>Working Temperature (°C)</b>	0~40
<b>Storage temperature (°C)</b>	0~40
<b>Working Humidity (%RH)</b>	45~70
<b>Protection Level</b>	IP65
<b>Wireless firmware update</b>	Yes
<b>Usable pages</b>	8
<b>LED color</b>	Red,Green and Blue,7 colors can be displayed
<b>Wireless connectivity</b>	Private Protocol
<b>RF Wireless Communication Parameters</b>	Working Frequency: 2400MHz ~ 2480MHz
<b>Communication mode</b>	AP
<b>Communication Distance</b>	Within 20m (Open distance: 50m)



Low Temperature Series **2.13"**  
 Model: DL0213F

### Specifications

Product Dimensions (mm*mm*mm)	71*34*12
<b>Case Color</b>	Blue+ white
<b>Weight (g)</b>	32
<b>Display Technology</b>	Full graphic E-ink display
<b>Display color</b>	BW
<b>Active Display Area (mm*mm)</b>	48.55*23.71
<b>Display Size (inch)</b>	2.13
<b>Resolution (pixel)</b>	250*122
<b>DPI</b>	130
<b>Working life</b>	5 years (4 updates per day)
<b>Battery Spec</b>	2 * CR2450, replaceable battery pack
<b>Working Temperature (°C)</b>	-25°-10°C
<b>Storage temperature (°C)</b>	-25°-10°C
<b>Working Humidity (%RH)</b>	45~70
<b>Protection Level</b>	IP68
<b>Wireless firmware update</b>	Yes
<b>Usable pages</b>	8
<b>LED color</b>	Red,Green and Blue,7 colors can be displayed
<b>Wireless connectivity</b>	Private Protocol
<b>RF Wireless Communication Parameters</b>	Working Frequency: 2400MHz ~ 2480MHz
<b>Communication mode</b>	AP
<b>Communication Distance</b>	Within 20m (Open distance: 50m)
<b>Packing quantity</b>	480/Box(full), 16.6kg



Low Temperature Series **2.66"**  
 Model: DL0266F

### Specifications

<b>Product Dimensions (mm*mm*mm)</b>	85.7*41.8*12.3
<b>Case Color</b>	Blue + white
<b>Weight (g)</b>	38
<b>Display Technology</b>	Full graphic E-ink display
<b>Display color</b>	BW
<b>Active Display Area (mm*mm)</b>	60.09*30.7
<b>Display Size (inch)</b>	2.66
<b>Resolution (pixel)</b>	296*152
<b>DPI</b>	125
<b>Working life</b>	5 years (4 updates per day)
<b>Battery Spec</b>	2 * CR2450, replaceable battery pack
<b>Working Temperature (°C)</b>	-25°-10°C
<b>Storage temperature (°C)</b>	-25°-10°C
<b>Working Humidity (%RH)</b>	45~70
<b>Protection Level</b>	IP68
<b>Wireless firmware update</b>	Yes
<b>Usable pages</b>	8
<b>LED color</b>	Red,Green and Blue,7 colors can be displayed
<b>Wireless connectivity</b>	Private Protocol
<b>RF Wireless Communication Parameters</b>	Working Frequency: 2400MHz ~ 2480MHz
<b>Communication mode</b>	AP
<b>Communication Distance</b>	Within 20m (Open distance: 50m)
<b>Packing quantity</b>	270/Box(full), 11.7kg



Waterproof Series **4.2"**

Model: DL0420W

### Specifications

<b>Product Dimensions (mm*mm*mm)</b>	99*89*12.3
<b>Case Color</b>	Blue + white
<b>Weight (g)</b>	75
<b>Display Technology</b>	Full graphic E-ink display
<b>Display color</b>	BWR
<b>Active Display Area (mm*mm)</b>	84.8*63.6
<b>Display Size (inch)</b>	4.2
<b>Resolution (pixel)</b>	400*300
<b>DPI</b>	119
<b>Working life</b>	5 years (4 updates per day)
<b>Battery Spec</b>	3 * CR2450, replaceable battery pack
<b>Working Temperature (°C)</b>	0~40
<b>Storage temperature (°C)</b>	0~40
<b>Working Humidity (%RH)</b>	45~70
<b>Protection Level</b>	IP 67
<b>Wireless firmware update</b>	Yes
<b>Usable pages</b>	8
<b>LED color</b>	Red,Green and Blue,7 colors can be displayed
<b>Wireless connectivity</b>	Private Protocol
<b>RF Wireless Communication Parameters</b>	Working Frequency: 2400MHz ~ 2480MHz
<b>Communication mode</b>	AP
<b>Communication Distance</b>	Within 20m (Open distance: 50m)
<b>Packing quantity</b>	180/Box(full), 16.2kg



Large Size Series **7.5"**

Model: DL0750

### Specifications

<b>Product Dimensions (mm*mm*mm)</b>	178*126*9
<b>Case Color</b>	White
<b>Weight (g)</b>	188
<b>Display Technology</b>	Full graphic E-ink display
<b>Display color</b>	BWRY
<b>Active Display Area (mm*mm)</b>	163*98
<b>Display Size (inch)</b>	7.5
<b>Resolution (pixel)</b>	800*480
<b>DPI</b>	124
<b>Working life</b>	5 years (4 updates per day)
<b>Battery Spec</b>	6 * CR2450, replaceable battery pack
<b>Working Temperature (°C)</b>	0~40
<b>Storage temperature (°C)</b>	0~40
<b>Working Humidity (%RH)</b>	45~70
<b>Protection Level</b>	IP65
<b>Wireless firmware update</b>	Yes
<b>Usable pages</b>	8
<b>LED color</b>	Red,Green and Blue,7 colors can be displayed
<b>Wireless connectivity</b>	Private Protocol
<b>RF Wireless Communication Parameters</b>	Working Frequency: 2400MHz ~ 2480MHz
<b>Communication mode</b>	AP
<b>Communication Distance</b>	Within 20m (Open distance: 50m)



Large Size Series **10.2"**

Model: DL0102

### Specifications

<b>Product Dimensions (mm*mm*mm)</b>	233*171*9
<b>Case Color</b>	White
<b>Weight (g)</b>	328
<b>Display Technology</b>	Full graphic E-ink display
<b>Display color</b>	BWR
<b>Active Display Area (mm*mm)</b>	215*144
<b>Display Size (inch)</b>	10.2
<b>Resolution (pixel)</b>	960*640
<b>DPI</b>	113
<b>Working life</b>	5 years (4 updates per day)
<b>Battery Spec</b>	12 * CR2430, replaceable battery pack
<b>Working Temperature (°C)</b>	0~40
<b>Storage temperature (°C)</b>	0~40
<b>Working Humidity (%RH)</b>	45~70
<b>Protection Level</b>	IP65
<b>Wireless firmware update</b>	Yes
<b>Usable pages</b>	8
<b>LED color</b>	Red,Green and Blue,7 colors can be displayed
<b>Wireless connectivity</b>	Private Protocol
<b>RF Wireless Communication Parameters</b>	Working Frequency: 2400MHz ~ 2480MHz
<b>Communication mode</b>	AP
<b>Communication Distance</b>	Within 20m (Open distance: 50m)

 <p><b>Automatic capsule coffee machine</b> EDG606 Commercial and Home Automatic Capsule Coffee Machine</p> <table border="1"> <tr><td>Product Name</td><td>Circolo</td></tr> <tr><td>Tank capacity</td><td>1300ml</td></tr> <tr><td>Reusable Capsule Capacity</td><td>5-26 Caps</td></tr> <tr><td>Heating Technology</td><td>Thermo block</td></tr> <tr><td>Heating Technology</td><td>3.7kg</td></tr> </table> <p><b>€ 586.<sup>90</sup></b></p> <p>User Reviews: ★★★★★</p>	Product Name	Circolo	Tank capacity	1300ml	Reusable Capsule Capacity	5-26 Caps	Heating Technology	Thermo block	Heating Technology	3.7kg		<p>Large Size Series <b>13.3"</b></p> <p>Model: DL0133</p>
Product Name	Circolo											
Tank capacity	1300ml											
Reusable Capsule Capacity	5-26 Caps											
Heating Technology	Thermo block											
Heating Technology	3.7kg											

## Specifications

<b>Product Dimensions (mm*mm*mm)</b>	294*230*9
<b>Case Color</b>	White
<b>Weight (g)</b>	599
<b>Display Technology</b>	Full graphic E-ink display
<b>Display color</b>	BWR
<b>Active Display Area (mm*mm)</b>	275*195
<b>Display Size (inch)</b>	13.3
<b>Resolution (pixel)</b>	960*680
<b>DPI</b>	88
<b>Working life</b>	5 years (2 updates per day)
<b>Battery Spec</b>	12 * CR2430, replaceable battery pack
<b>Working Temperature (°C)</b>	0~40
<b>Storage temperature (°C)</b>	0~40
<b>Working Humidity (%RH)</b>	45~70
<b>Protection Level</b>	IP65
<b>Wireless firmware update</b>	Yes
<b>Usable pages</b>	8
<b>LED color</b>	Red,Green and Blue,7 colors can be displayed
<b>Wireless connectivity</b>	Private Protocol
<b>RF Wireless Communication Parameters</b>	Working Frequency: 2400MHz ~ 2480MHz
<b>Communication mode</b>	AP
<b>Communication Distance</b>	Within 20m (Open distance: 50m)